


Transitional Shades

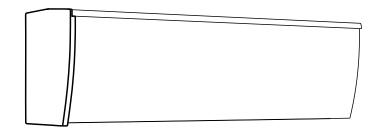

Modern Cassette

Installation Instructions

Thank You

Thank you for choosing your Allure Transitional Shade With proper installation and care, your new shades will provide many years of beauty and performance.

Before Installing

Remove shade from the package. Keep all packaging until shade operates to your satisfaction. Contents of your hardware package may vary depending on options chosen.

Additional fasteners may be needed on your specific mounting surface (not included).




Shade Width	Brackets Required	2-on-1 Headrail
15" - 48" 48 1/16" - 72" 72 1/16" - 90" 90 1/16" - 120" 120 1/16" - 156"	2 3 4 5 6	If installing a 2-on-1 headrail: one bracket is required to be located at the Center Gap

Step 1 Space Brackets in Window

Measure 2" in from each end of the headrail and mark the bracket location on the mounting surface.

Space additional brackets evenly between the end brackets and mark the bracket location on the mounting surface




Note: install brackets into studs or headers when possible, and space evenly



If spacer blocks are being used, place in between mounting surface and bracket before attaching with screws (Longer screws may be required)


IMPORTANT: Brackets need to be Level and Aligned
Shimming Brackets may be required




Use two screws to secure to the mounting surface

INSIDE MOUNT










IMPORTANT: Two screws are needed to attach each installation bracket


Step 3


Install the Shade





Center Shade with Window Opening














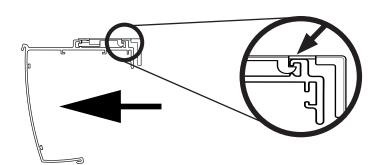


Pull forward on the Cassette to make sure the rear lip on the cassette is fully seated on the brackets

Clutch: Right Hand Control






Pull gently on the front side of the chain to to raise it.




Accu-Rise



Find the Center of your Bottom Rail

Snap the Handle onto the rail in the center position




Pull Accu-Rise shade gently from the Handle to lower it.

Push up from center to raise it.

Troubleshooting:

If shade doesn't raise, the roller may be binding on the internal brackets.

Remove End Caps and gently pry the internal bracket away from the roller so that it moves freely




Cord Tension Lock



Installers MUST INSTALL Cord Tension Lock Properly

Mark Mounting Position

Lower shade to make sure the Cord Tension Lock is not placed in the path of the bottom rail or fabric

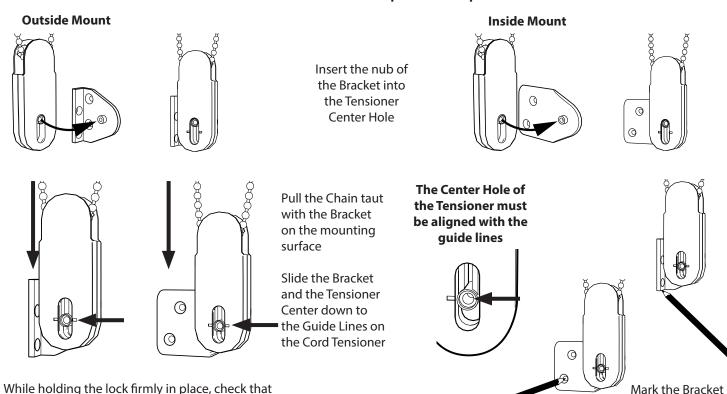


the loop can move freely through the Tensioner

If the Tensioner locks onto the loop, it is too loose and the bracket and lock should be **moved down**If the loop does not run freely through the lock, it is too tight and the bracket and lock should be **moved up**

Attach the Bracket to Mounting Surface Outside Mount

If the Bracket is not Aligned properly:



Move Tensioner out of the way and attach to Mounting Surface with the Two Longer Screws provided


4 (a)

Inside Mount

Attach the Cord Tension Lock to Bracket

Pull the Tensioner's spring loaded Slider down to the bracket


a small tool may be helpful in moving the slider




Make sure the Tensioner's Center Hole is seated on the nub of the bracket

Use the small screw to attach Tensioner

Do not Overtighten





location on the Mounting Surface

P-Clip Safety Tensioner







Position the Tensioner

Lower shade to make sure the P-Clip is not placed in the path of the bottom rail or fabric

Determine the orientation of the P-Clip Tensioner









With the shade securely installed, pull the chain taut then relax the chain slightly then Mark the location of the P-Clip

Install the Tensioner

Make sure that the cord or chain is taut and moves freely through the Tensioner

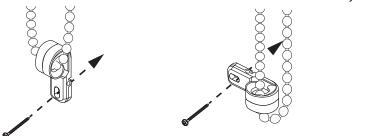



Then secure to the mounting surface using the screw provided


IMPORTANT: the Tension Lock must be properly secured to the wall or window frame to reduce a child's access to the chain or cord loops.

Young children and pets can wrap chains around their necks and strangle themselves.

Step 6

Install Hold Down Magnetic (standard)


Remove Film from Magnet strips and attach to Top and Bottom of the Rail





Determine the orientation of the Hold Down Bracket

Lower the shade to the closed position and mark the Bracket location where it attaches to the TOP of the Rail


This allows the shade to be opened while still attached to the bracket





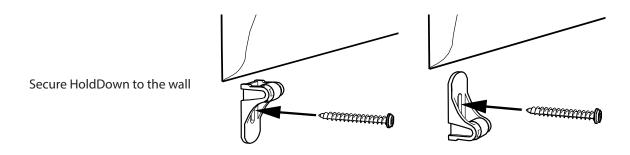


Step 6 Install Hold Down (optional)



Lower the shade to the closed position

line up the Hold Down bracket where the pin on the Rail is at the bottom of the slot

This allows the shade to be opened while still in the bracket




Attach Bracket to mounting Surface



Rotate the bottom rail to get the pins into the brackets

Shade Removal

Use DIRECT force to push the cassette back into the spring loaded tab



Rotate the rear of the shade down and away from the bracket to remove

