




# HSM Series Heated Shelf Merchandiser



## Specifications

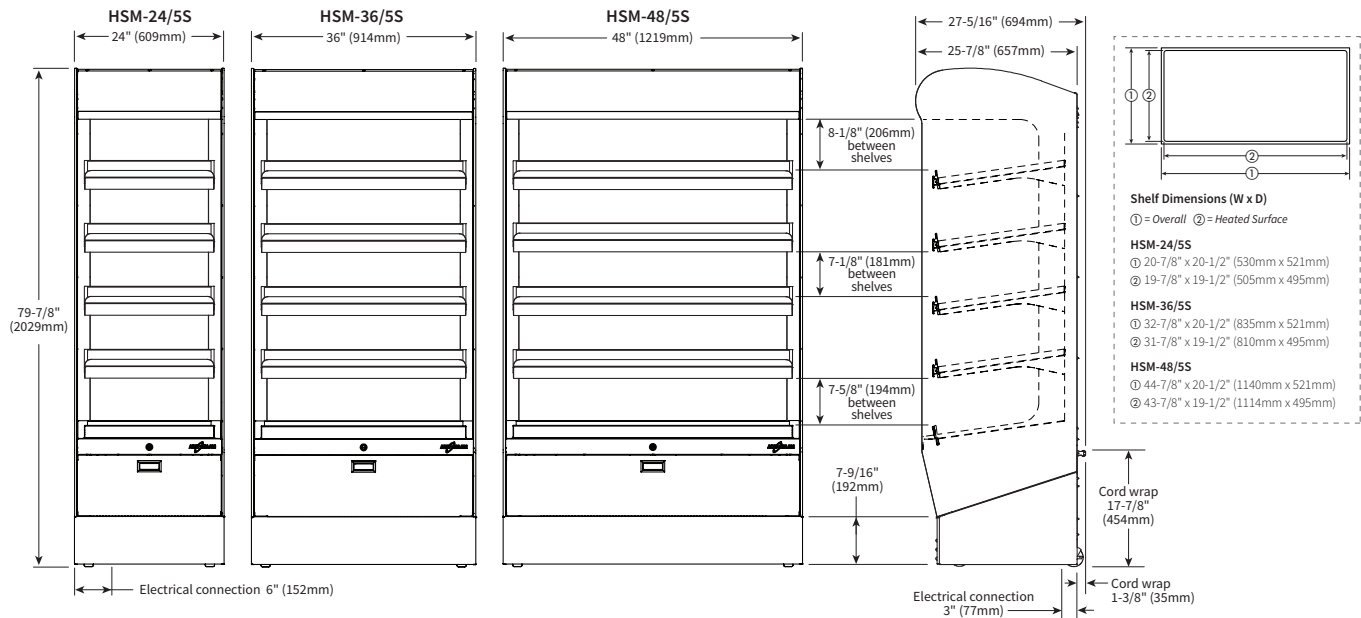

CHECK FIRST

- Merchandiser must be installed level.
- Merchandiser must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- In order to maintain NSF standards, floor models must be equipped with casters or 6" (152mm) legs.



CLEARANCE

### Rear: 4" (102mm)

Recommended: 18" (457mm) for service access. Charges in connection with inadequate service access is not covered under warranty.



DIMENSIONS

Model	Exterior (H x W x D)	Net Weight
HSM-24/5S	79-7/8" x 24" x 27-5/16" (2029mm x 609mm x 694mm)	406 lb (184 kg)
HSM-36/5S	79-7/8" x 36" x 27-5/16" (2029mm x 914mm x 694mm)	496 lb (225 kg)
HSM-48/5S	79-7/8" x 48" x 27-5/16" (2028mm x 1219mm x 694mm)	563 lb (255 kg)


Model	Ship Dimensions (L x W x H)*	Ship Weight*
HSM-24/5S	36" x 36" x 89" (914mm x 914mm x 2261mm)	550 lb (249 kg)
HSM-36/5S	56" x 45" x 89" (1422mm x 1143mm x 2261mm)	652 lb (296 kg)
HSM-48/5S	56" x 63" x 89" (1422mm x 1600mm x 2261mm)	772 lb (350 kg)

\*Domestic ground shipping information. Contact factory for export weight and dimensions.



ELECTRIC

	V	Ph	Hz	A	kW	Plug Configuration
<b>HSM-24/5S</b>	208 – 240	1	60	10.8 – 12.5	2.2 – 3.0	NEMA 6-20P (20A, 250V)
	230	1	50/60	11.5	2.9	CEE 7/7   CH2-16P   BS 1363
<b>HSM-36/5S</b>	208 – 240	1	60	14.4 – 16.7	3.0 – 4.0	cord, no plug
	230	1	50/60	15.0	3.5	CEE 7/7   CH2-16P   BS 1363
<b>HSM-48/5S</b>	208 – 240	1	60	19.0 – 21.9	4.0 – 5.3	cord, no plug
	230	1	50/60	20.0	4.6	cord, no plug



CE IP X4

## CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.  
 Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | [alto-shaam.com](http://alto-shaam.com)